CON232K

RS232 TO KEYBOARD PS/2 CONVERTER Product Specification

Specifications

Power Requirements	From PC PS/2 Interface
Interface	RS232 (Male) to PS/2 (PC Keyboard)
Baud rate	2400,4800,9600,19200 bps , N, 8, 1
Language	USA, SPANISH, ENGLISH, GERMANY, FRANCE, JANPAN for PS/2
Transponders supported	
Technical certificates	CE , FCC
Dimensions	52 * 35 * 18 mm
Weight	Approx. 60g include cable
Environment	Operating Temp : -10 ~ + 60 Deg.c Storage Temp : -20 ~ + 65 Deg.c Humidity : 10 ~ 90 relative

Dip switch Configurations

Switch NO.			Language
1	2	3	
OFF	OFF	OFF	USA
OFF	ON	OFF	SPANISH
ON	ON	OFF	ENGLISH
OFF	OFF	ON	GERMANY
ON	OFF	ON	FRANCE
OFF	ON	ON	JANPAN

Switch NO.		Baudrate
4	5	
OFF	OFF	19200
NO	OFF	9600
OFF	ON	4800
ON	ON	2400

Switch NO.		DC+5V Output (From PC PS/2)
7	8	
OFF	OFF	X
NO	OFF	RS232 Pin 1 output
OFF	ON	RS232 Pin 9 output
ON	ON	RS232 Pin1&9 output
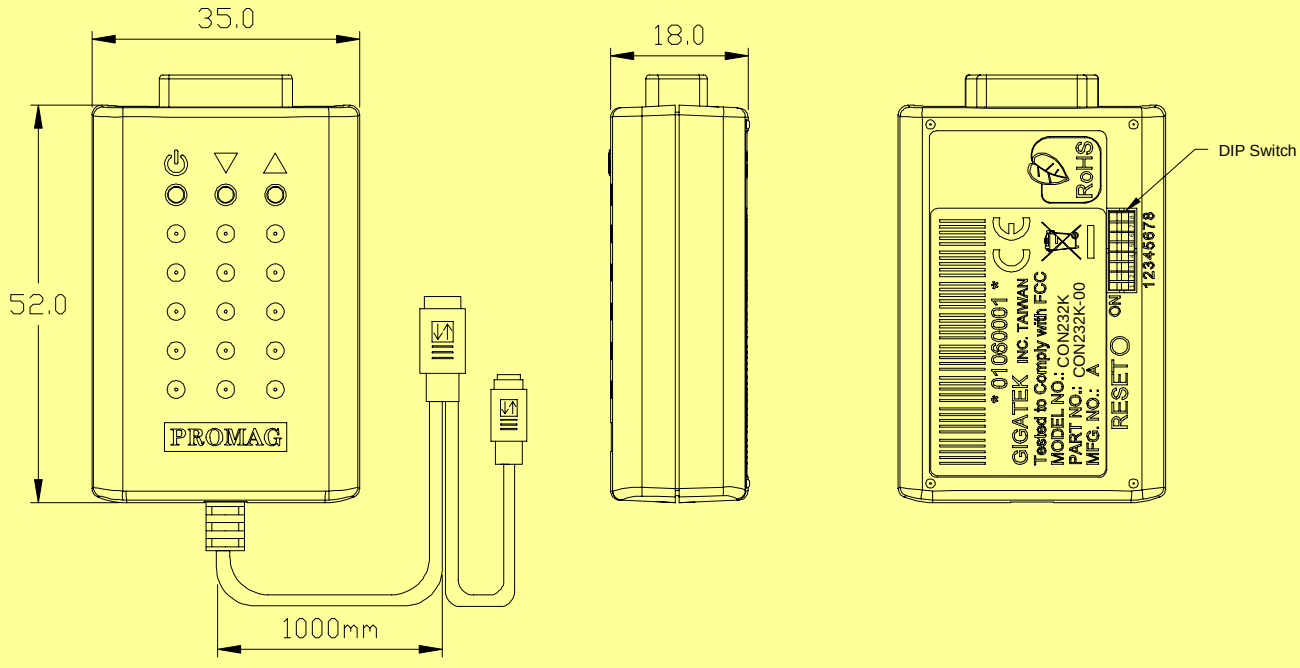
Dimensions